


# instruction


## MOUNTING OF BRACKETS

- a. Carefully measure and mark the drilling locations in the wall or the ceiling.
- b. Drill holes for the screws. Depending on the type of wall or ceiling it may be necessary to use dowels.
- c. Screw the brackets to the wall or ceiling - as shown in the drawings. A - to the ceiling B - to the wall

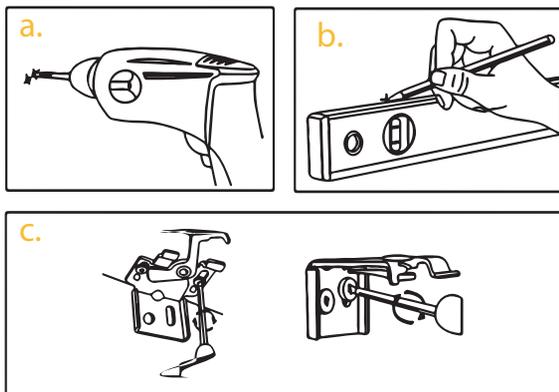

## CHAIN TENSIONER ATTACHMENT


So that the chain does not hang loosely next to the window, recommended is installation of the included chain tensioner kit. Installation with a screw-driver or adhesive tape.

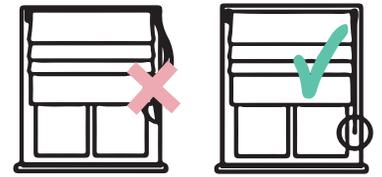


Mounting with screws to the wall. Installation with adhesive tape to the window.

## MOUNTING THE CASSETTE ON THE BRACKETS

- a. Move the clip.
- b. Put the blind cassette on the brackets. Attach it from above, pressing gently towards the wall.
- c. Tighten the clip.
- d. Correctly mounted blind.

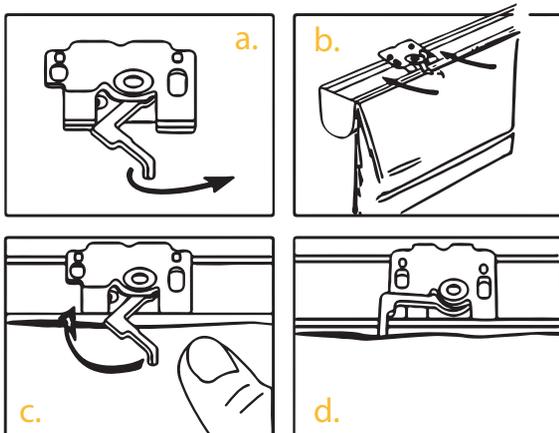

## WASHING THE BLINDS



The blind is mounted to the cassette with a Velcro tape, which enables washing it.

### OUR ADVICE

Before you start to unstring blinds, take pictures of interlacing strings. This will help you to assemble the cords properly when washed.

### To wash the blinds:

1. remove the cassette with the blind from the brackets
2. roll it out all the way
3. untie the strings and pull out the horizontal stiffeners
4. detach the fabric from the cassette/rail (Velcro tape)

### After washing and ironing:

1. attach the fabric to the cassette/rail
2. put in horizontal stiffeners
3. the strings go through the rings. Align and tie up at the bottom.
4. reattach the blind to the brackets

## Attention!

Danger of suffocation. Hold the strings and loops of chains beyond the reach of small children. In the packaging there are small parts. There is a risk of ingestion or choking on small parts by children.

